

## GRN-80 MULTI SERIES OPERATING INSTRUCTIONS

**INPUT RATING:** 100-240VAC, 3 A, 50-60 Hz.

**OUTPUT RATING:** 80 Watts Maximum Total Continuous Output Power.

<b>MODEL LISTING:</b>	<u>MODEL</u>	<u>OUTPUT 1</u>	<u>OUTPUT 2</u>	<u>OUTPUT 3</u>	<u>OUTPUT 4</u>
	GRN-80-4001	+3.3V/8A	+5V/5A	+12V/1.5A	-12V/1.5A
	GRN-80-4002	+5V/8A	-5V/5A	+12V/1.5A	-12V/1.5A
	GRN-80-4003	+5V/8A	+24V/1A	+12V/1.5A	-12V/1.5A
	GRN-80-4004	+5V/8A	+24V/1A	+15V/1.5A	-15V/1.5A
	GRN-80-4005	+3.5V/3.5A	+5.25V/1A	+18V/1.5A	-18V/1.5A
	GRN-80-3001	+5V/8A		+12V/2A	-12V/2A
	GRN-80-3002	+5V/8A		+15V/2A	-15V/2A
	GRN-80-2001	+5V/8A	+24V/2A		
	GRN-80-2002	+5V/8A	+12V/4A		
	GRN-80-2003	+12V/4A	-12V/4A		
	GRN-80-2004	+15V/3A	-15V/3A		

**NOTES:** 1. A suffix may be added to the model number to indicate the following optional configurations:  
(CH-chassis, CO-cover, IO-isolated outputs, TS-terminal strip).

**CLASSIFICATION:** 1. Protection against electric shock – Class I.  
2. Protection against harmful ingress of water – IPX0 (Non-protected), ordinary.  
3. Methods of sterilization – None.  
4. Suitability for use in an oxygen rich environment – End user responsibility, not evaluated.  
5. Mode of operation – Continuous

**WARNING!  
RISK OF FIRE!** An open internal fuse indicates a catastrophic failure of circuit component(s). Repair must be by authorized IPD personnel only.  
Refer to fuse rating on power supply circuit board for rating.

**WARNING!  
SHOCK HAZARD!** Dangerous voltages are present on some components, printed circuit board traces and heatsinks.  
All GRN Series Multi products may continue running for up to one minute after AC power is removed.

**INPUT FUSE:** This product includes a single fuse in the phase lead only. In consideration of clause 8.11.5 of IEC 60601-1:2005, a second fuse may be required in neutral lead of the end use equipment.

**SEPARATION:** Primary to Secondary creepage distance is 8mm minimum, clearance 5mm minimum (2MOPP). Primary to Ground creepage distance is 4mm minimum, clearance 2.5mm minimum (1MOPP). Secondary to Ground creepage distance is 2.3mm minimum, clearance 1.4mm minimum (Operational Insulation). Required separation must be maintained in the end product to preserve the established means of protection.

**OUTPUTS:** Outputs are not acceptable for patient connection without additional isolation. All outputs are SELV under normal and single fault conditions unless otherwise indicated.

**TEMPERATURES:** The maximum operating temperatures of safety components as defined in the applicable safety standards must not be exceeded after installation in the end use equipment.

**HIPOT:** In consideration of IEC 60601-1:2005 Clause 8.8.3, care must be taken to insure the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Breakdown of basic insulation and catastrophic failure of the power supply may result if a test voltage of greater than 1800 VAC is applied between primary and secondary circuits. Each isolating component is factory tested at 4000 VAC minimum prior to installation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product.

**INSTALLATION:** These power supplies are considered components intended for professional installation into end use equipment. The protective earth (ground) terminal must be bonded to protective earth in the end use equipment.

**EMISSIONS:** This product was tested for compliance with EN 55022 and EN 55011 Class B conducted and radiated emissions using the techniques listed below and non-inductive load resistors to simulate operation in a typical installation. All or a combination of the following requirements may be necessary to insure compliance in the end use equipment.

1. Installation of the power supply, output cables and loads in a shielded enclosure.
2. Use of optional chassis and cover.
3. Use of shielded I/O cables.
4. Use of ferrite beads on I/O cables.
5. Grounded output returns.



**DECLARATION OF CONFORMITY**

Manufacturer: Integrated Power Designs, Inc.  
Manufacturer's Address: 300 Stewart Road, Wilkes-Barre, PA 18706 USA

Declares all models listed above including all options are in compliance with the following European Community Directives:

**Low Voltage Directive 2014/35/EU of 26 February 2014**  
**RoHS Directive 2011/65/EU of 8 June 2011**

In addition, all models are Certified to be in compliance with applicable requirements of UL 60950-1:2007, ANSI/AAMI ES60601:2005/(R) 2012, IEC 60950-1/A2:2013 and IEC 60601-1:2005/A1:2012 including all EU national deviations, CAN/CSA-C22.2 No. 60950-1-07, CAN/CSA- C22.2 No. 60601-1:2014, EN 60950-1:2006/A2:2013 and EN 60601-1:2006/A1:2013.


BY: Steven Thompson- President

PLACE: Integrated Power Designs  
300 Stewart Road, Wilkes-Barre, PA 18706 USA  
DATE: January 3, 2017

**EUROPEAN CONTACT:**

Compumess Elektronik GmbH  
Lise-Meitner-Strasse 1  
85716 Unterschleißheim  
Telephone (089) 32 15 01-0

**DIMENSIONS:**

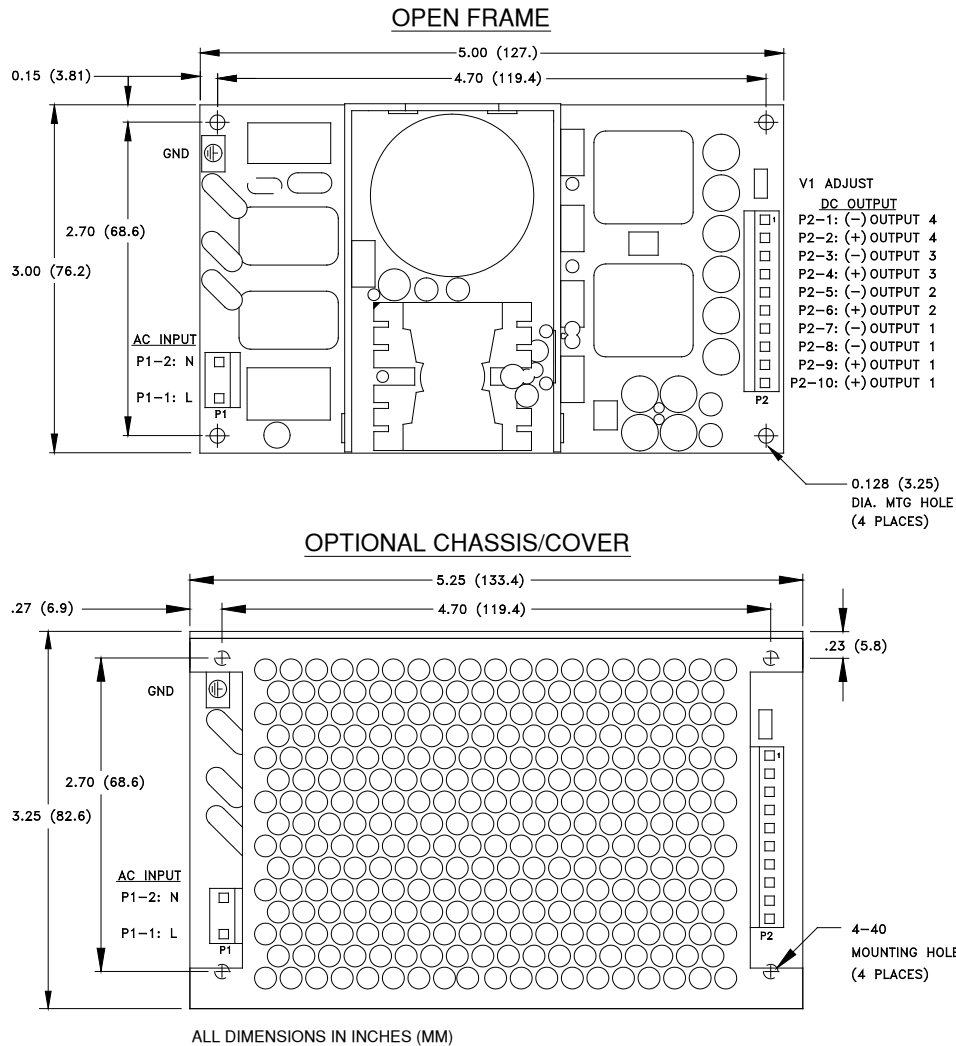

**CONNECTORS:**

- P1 (AC Input) .156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 640706-1 or equivalent crimp terminal.
- P2 (DC Output) .156 friction lock header mates with Tyco 1-770849-0 or equivalent crimp terminal housing with Tyco 640707-1 or equivalent crimp terminal.
- GND (Ground) .187 quick disconnect terminal