

SRW-45 SERIES OPERATING INSTRUCTIONS

INPUT RATING: 100-240VAC, 2 A, 50-60 Hz.
200-240VAC, 2 A, 50-60 Hz. (SRW-45-2012 Only)

OUTPUT RATING: 45 Watts maximum, convection cooled.

MODEL LISTING:	Model	Output 1	Output 2	Output 3	Output 4
	SRW-45-4001	+5VDC/5A	-5VDC/2A	+12VDC/0.7A	-12VDC/0.7A
	SRW-45-4002	+5VDC/5A	-5VDC/2A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-4003	+5VDC/5A	+24VDC/1A	+12VDC/0.7A	-12VDC/0.7A
	SRW-45-4004	+5VDC/5A	+24VDC/1A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-4005	+5VDC/5A	+24VDC/1A	+12VDC/0.7A	-5VDC/0.7A
	SRW-45-4006	+5VDC/5A	+15VDC/2A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-4007	8VDC/2A	8VDC/0.5A	18VDC/0.7A	18VDC/0.7A
	SRW-45-4008	+3.3VDC/5A	+3.3VDC/3A	5VDC/3A	12VDC/0.7A
	SRW-45-4009	+5VDC/5A	+27VDC/1A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-4010	+5VDC/5A	+32VDC/1A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-4011	+5VDC/5A	+24VDC/1A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-4012	+5VDC/5A	+12VDC/3A	9VDC/1A	-12VDC/0.7A
	SRW-45-4013	+8VDC/2A	-8VDC/0.5A	+15VDC/0.7A	-15VDC/0.7A
	SRW-45-3001	+5VDC/5A	+12VDC/3A	----	-12VDC/0.7A
	SRW-45-3002	+5VDC/5A	+15VDC/2A	----	-15VDC/0.7A
	SRW-45-3003	+5VDC/5A	+24VDC/1.5A	----	-12VDC/0.7A
	SRW-45-3004	+5VDC/5A	+9VDC/3A	----	-12VDC/0.7A
	SRW-45-3005	+5VDC/5A	+18VDC/2A	----	-18VDC/0.7A
	SRW-45-3006	+5VDC/5A	+15VDC/2.5A	-15VDC/2.5A	----
	SRW-45-3007	+5VDC/5A	24VDC/1.8A	----	-5VDC/0.7A
	SRW-45-2001	+5VDC/5A	+12VDC/3A	----	----
	SRW-45-2002	+5VDC/5A	-5VDC/4A	----	----
	SRW-45-2003	+5VDC/5A	+24VDC/1.5A	----	----
	SRW-45-2004	+12VDC/3A	-12VDC/2A	----	----
	SRW-45-2005	+15VDC/2.5A	-15VDC/2A	----	----
	SRW-45-2006	+5VDC/5A	+15VDC/3A	----	----
	SRW-45-2007	+18VDC/1.5A	-18VDC/1A	----	----
	SRW-45-2008	+5VDC/5A	+13VDC/3A	----	----
	SRW-45-2009	+5VDC/2.5A	+21VDC/1A	----	----
	SRW-45-2010	+5VDC/5A	-5VDC/4A	----	----
	SRW-45-2011	+24VDC/1.5A	----	+15VDC/0.7A	----
	SRW-45-2012	+5VDC/2.5A	+21VDC/1A	----	----
	SRW-45-2013	+24VDC/1A	-24VDC/1A	----	----
	SRW-45-1001	+5VDC/9A	----	----	----
	SRW-45-1002	+12VDC/4A	----	----	----
	SRW-45-1003	+15VDC/3A	----	----	----
	SRW-45-1004	+24VDC/2A	----	----	----
	SRW-45-1006	13.8VDC/3.3A	----	----	----

NOTES: 1. A suffix may be added to the model number to indicate the following optional configurations:
(CH-chassis, CO-cover, IO-isolated output, TS-terminal strip, OVP-over voltage protection).

CE	<u>DECLARATION OF CONFORMITY</u>	UK CA
<p>Manufacturer: Integrated Power Designs, Inc. Manufacturer's Address: 300 Stewart Road, Wilkes-Barre, PA 18706 USA Product Type: Switchmode AC-DC Power Supply</p>		
<p>Declares all models listed above including all options are in compliance with the following European Community Directives:</p> <p style="margin-left: 20px;">Low Voltage Directive 2014/35/EU of 26 February 2014 RoHS Directive 2015/863/EU of 31 March 2015</p> <p>As well as with the requirements set out in the Laws of the United Kingdom relating to and applying the following standards:</p> <p style="margin-left: 20px;">Electrical Equipment (Safety) Regulations 2016 SI No. 1101 BS EN 62368-1:2014 Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 SI No. 3032 + 2019 SI No.492</p> <p>In addition, all models are Certified to be in compliance with applicable requirements of UL 60950-1:2007, IEC 62368-1:2014 including all EU national deviations, CAN/CSA-C22.2 No. 60950-1-07 and EN 62368-1:2014.</p>		
<p>BY: Steven Thompson- President PLACE: Integrated Power Designs 300 Stewart Road, Wilkes-Barre, PA 18706 USA DATE: February 16, 2021</p>	<p>EUROPEAN CONTACT: Compumess Elektronik GmbH Lise-Meitner-Strasse 1 85716 Unterschleißheim Telephone (089) 32 15 01-0</p>	<p>UK CONTACT: ALL PSU LTD Laser Quay, Culpeper Close Rochester Kent ME2 4HU Tel : 01634 725527</p>

**WARNING!
RISK OF FIRE!**

An open internal fuse indicates a catastrophic failure of circuit component(s). Repair must be by authorized IPD personnel only. Refer to fuse rating on power supply circuit board for rating.

**WARNING!
SHOCK HAZARD!**

Dangerous voltages are present on some components, printed circuit board traces and heatsinks.

GROUNDING:

The protective earth (ground) terminal and mounting hole pad must be bonded to protective earth in the end use equipment. Use of metallic spacers or the optional chassis is recommended.

ISOLATION:

Primary to secondary creepage distance is 6.3 mm minimum. Primary to ground creepage distance is 2.5 mm minimum. Secondary to ground creepage is not specified. The required creepage distances from primary to secondary and primary to ground must be maintained in the end use equipment to preserve the required safety spacings.

OUTPUTS:

All outputs are SELV/ES1 under normal and single fault conditions

TEMPERATURES:

The maximum operating temperatures of safety components as defined in the applicable safety standards must not be exceeded after installation in the end use equipment. Output power, ambient air temperature and convection or forced air cooling availability should be considered in the end use equipment.

HIPOT:

In consideration of UL 60950-1 2nd Edition Clause 5.2.2, care must be taken to insure the voltage applied to a reinforced insulation does not overstress basic insulation. Breakdown of basic insulation and catastrophic failure of the power supply may result if a test voltage of greater than 1500 VAC/2121VDC is applied between primary and secondary circuits. Each isolating component is factory tested at 3000 VAC minimum prior to installation.

INSTALLATION:


The power supplies included in model listing on reverse side are considered components intended for professional installation into end use equipment.

EMISSIONS:

This product was tested for compliance with EN 55022 Class B conducted emissions using the techniques listed below and non-inductive load resistors to simulate operation in a typical installation. All or a combination of the following requirements may be necessary to insure compliance in the end use equipment.

1. Installation of the power supply, output cables and loads in a shielded enclosure.
2. Use of optional chassis and cover.
3. Use of shielded I/O cables.
4. Use of ferrite beads on I/O cables.
5. Grounded output returns as specified under GROUNDING above.

CONNECTIONS / DIMENSIONS:

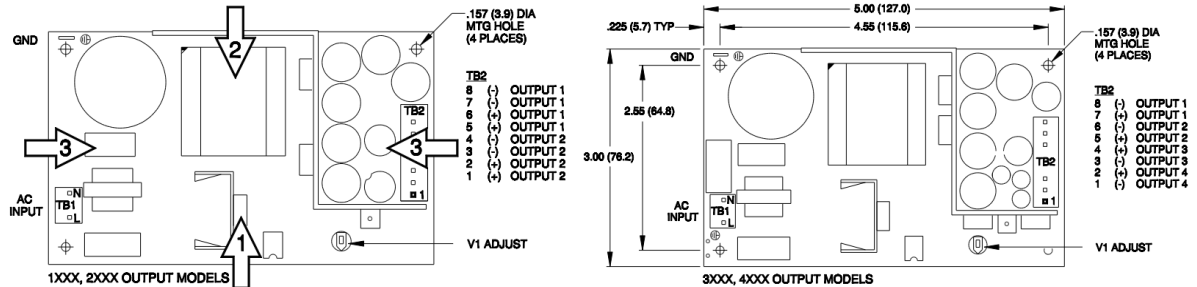

**AIR FLOW
DIRECTION:**

1 - Recommended, 2 - Good, 3 - Fair.

CONNECTORS:

TB1: AC Input - .156 friction lock header mates with Molex 09-50-3031 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.
TB2: DC Output - .156 friction lock header mates with Molex 09-50-3081 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.
G: Ground - .187 quick disconnect terminal.